


MACHINE SPECIFICATIONS

F	Platform length	m (in)	2.25 (89)
	Platform width	m (in)	1.15 (46)
G	Platform height	m (in)	1.1 (43)
	Load capacity	kg (lb)	450 (990)
	Max. platform occupants (indoor / outdoor)	person	2 / 2
	Max. allowable slope (front to back / side to side)	degrees	3 / 1.5
H	Ground clearance	m (in)	0.1 (4)
	Wheelbase	m (in)	1.85 (73)
	Turning radius (outside)	m (ft-in)	2.35 (7-8)
	Turning radius (inside)	m (in)	0
	Gradeability	%	25
	Max driving speed (stowed)	km/h (mph)	4.5
	Max driving speed (raised)	km/h (mph)	0.8
	Raising speed (loaded)	s	43-49
	Lowering speed (loaded)	s	30-36
	Solid tyre dimensions	mm (ins)	380 x 133 (15 x 5)
	Hydraulic tank volume	L	12
	Hydraulic system volume	L	16
	Hydraulic system pressure	MPa	24.8
	Battery	Ah @ 20h	6V x 4 (240)
	Power unit	V	24
	Input voltage of charger	V AC	100-240V
	Tyres		Non-marking

DIMENSIONS - ELECTRIC DRIVE

A	Max. platform height (indoor)	m (ft-in)	7.90 (25-11)
	Max. platform height (outdoor)		7.90 (25-11)
	Max. working height	m (ft-in)	9.90 (31-11)
B	Extension outreach	m (in)	0.9 (35)
C	Overall length (stowed)	m (ft-in)	2.39 (7-10)
D	Overall width (stowed)	m (ft-in)	1.18 (3-10.5)
	Overall height (stowed, guardrail folded)	m (ft-in)	1.96 (6-5)
E	Overall height (stowed, guardrail unfolded)	m (ft-in)	2.35 (7-8)
	Overall weight	kg (lb)	2647 (5836)

WORK ENVELOPE

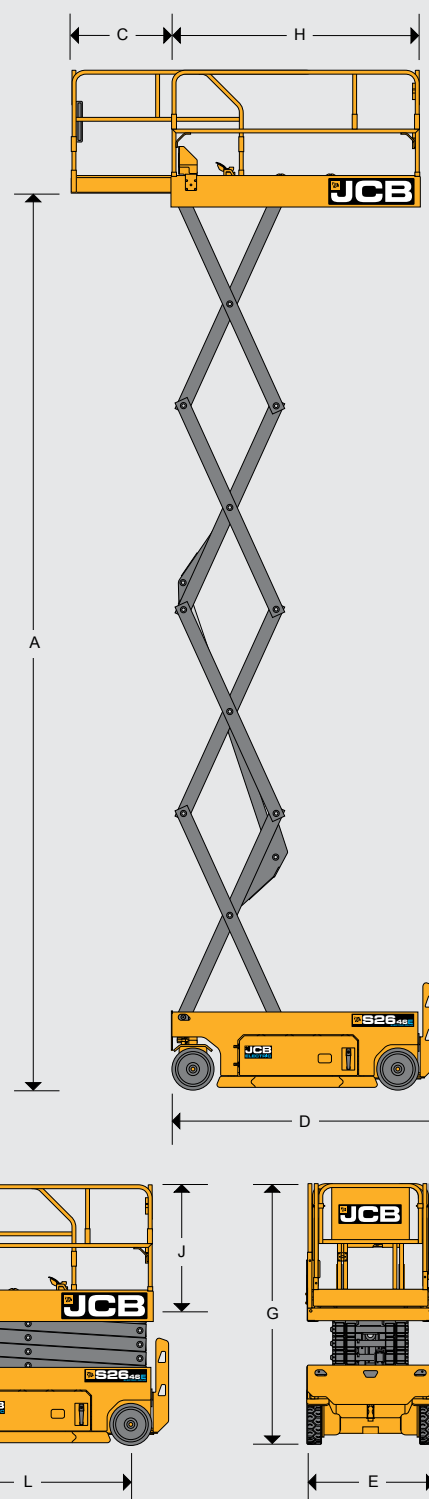

Your nearest JCB dealer

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: salesinfo@jcb.com

Download the very latest information on this product range at: www.jcb.com