

ELECTRIC ACCESS PLATFORMS | S1932E-S4550E



HIGHER STANDARDS



PLATFORM HEIGHTS
5.7m – 13.8m


GREATER PRODUCTIVITY

Designed using 75 years of engineering expertise, the JCB Electric Scissor range is ideal for rental companies and contractors worldwide.




HIGH PERFORMANCE

JCB's Electric Drive range uses world-class parts and materials, offering proven durability and up to 53% more runtime on a single battery charge.

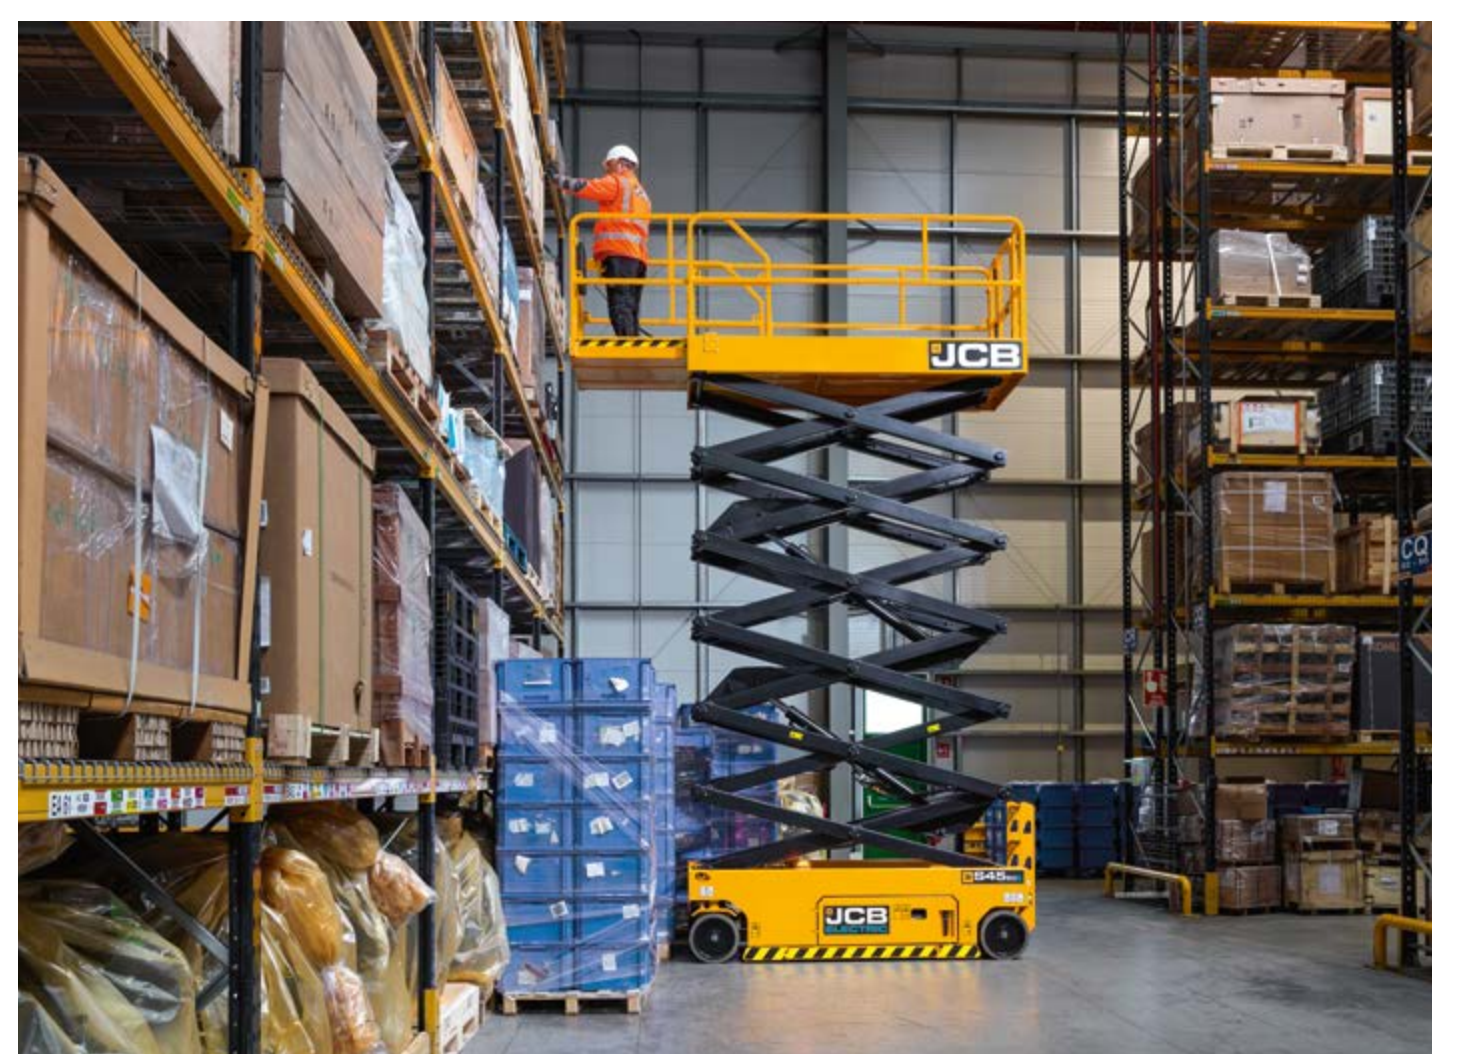

BUILT TO LAST

Features such as motor protection plates, wear pads between scissor sections to stop metal-on-metal wear and warning light protection maximise uptime.

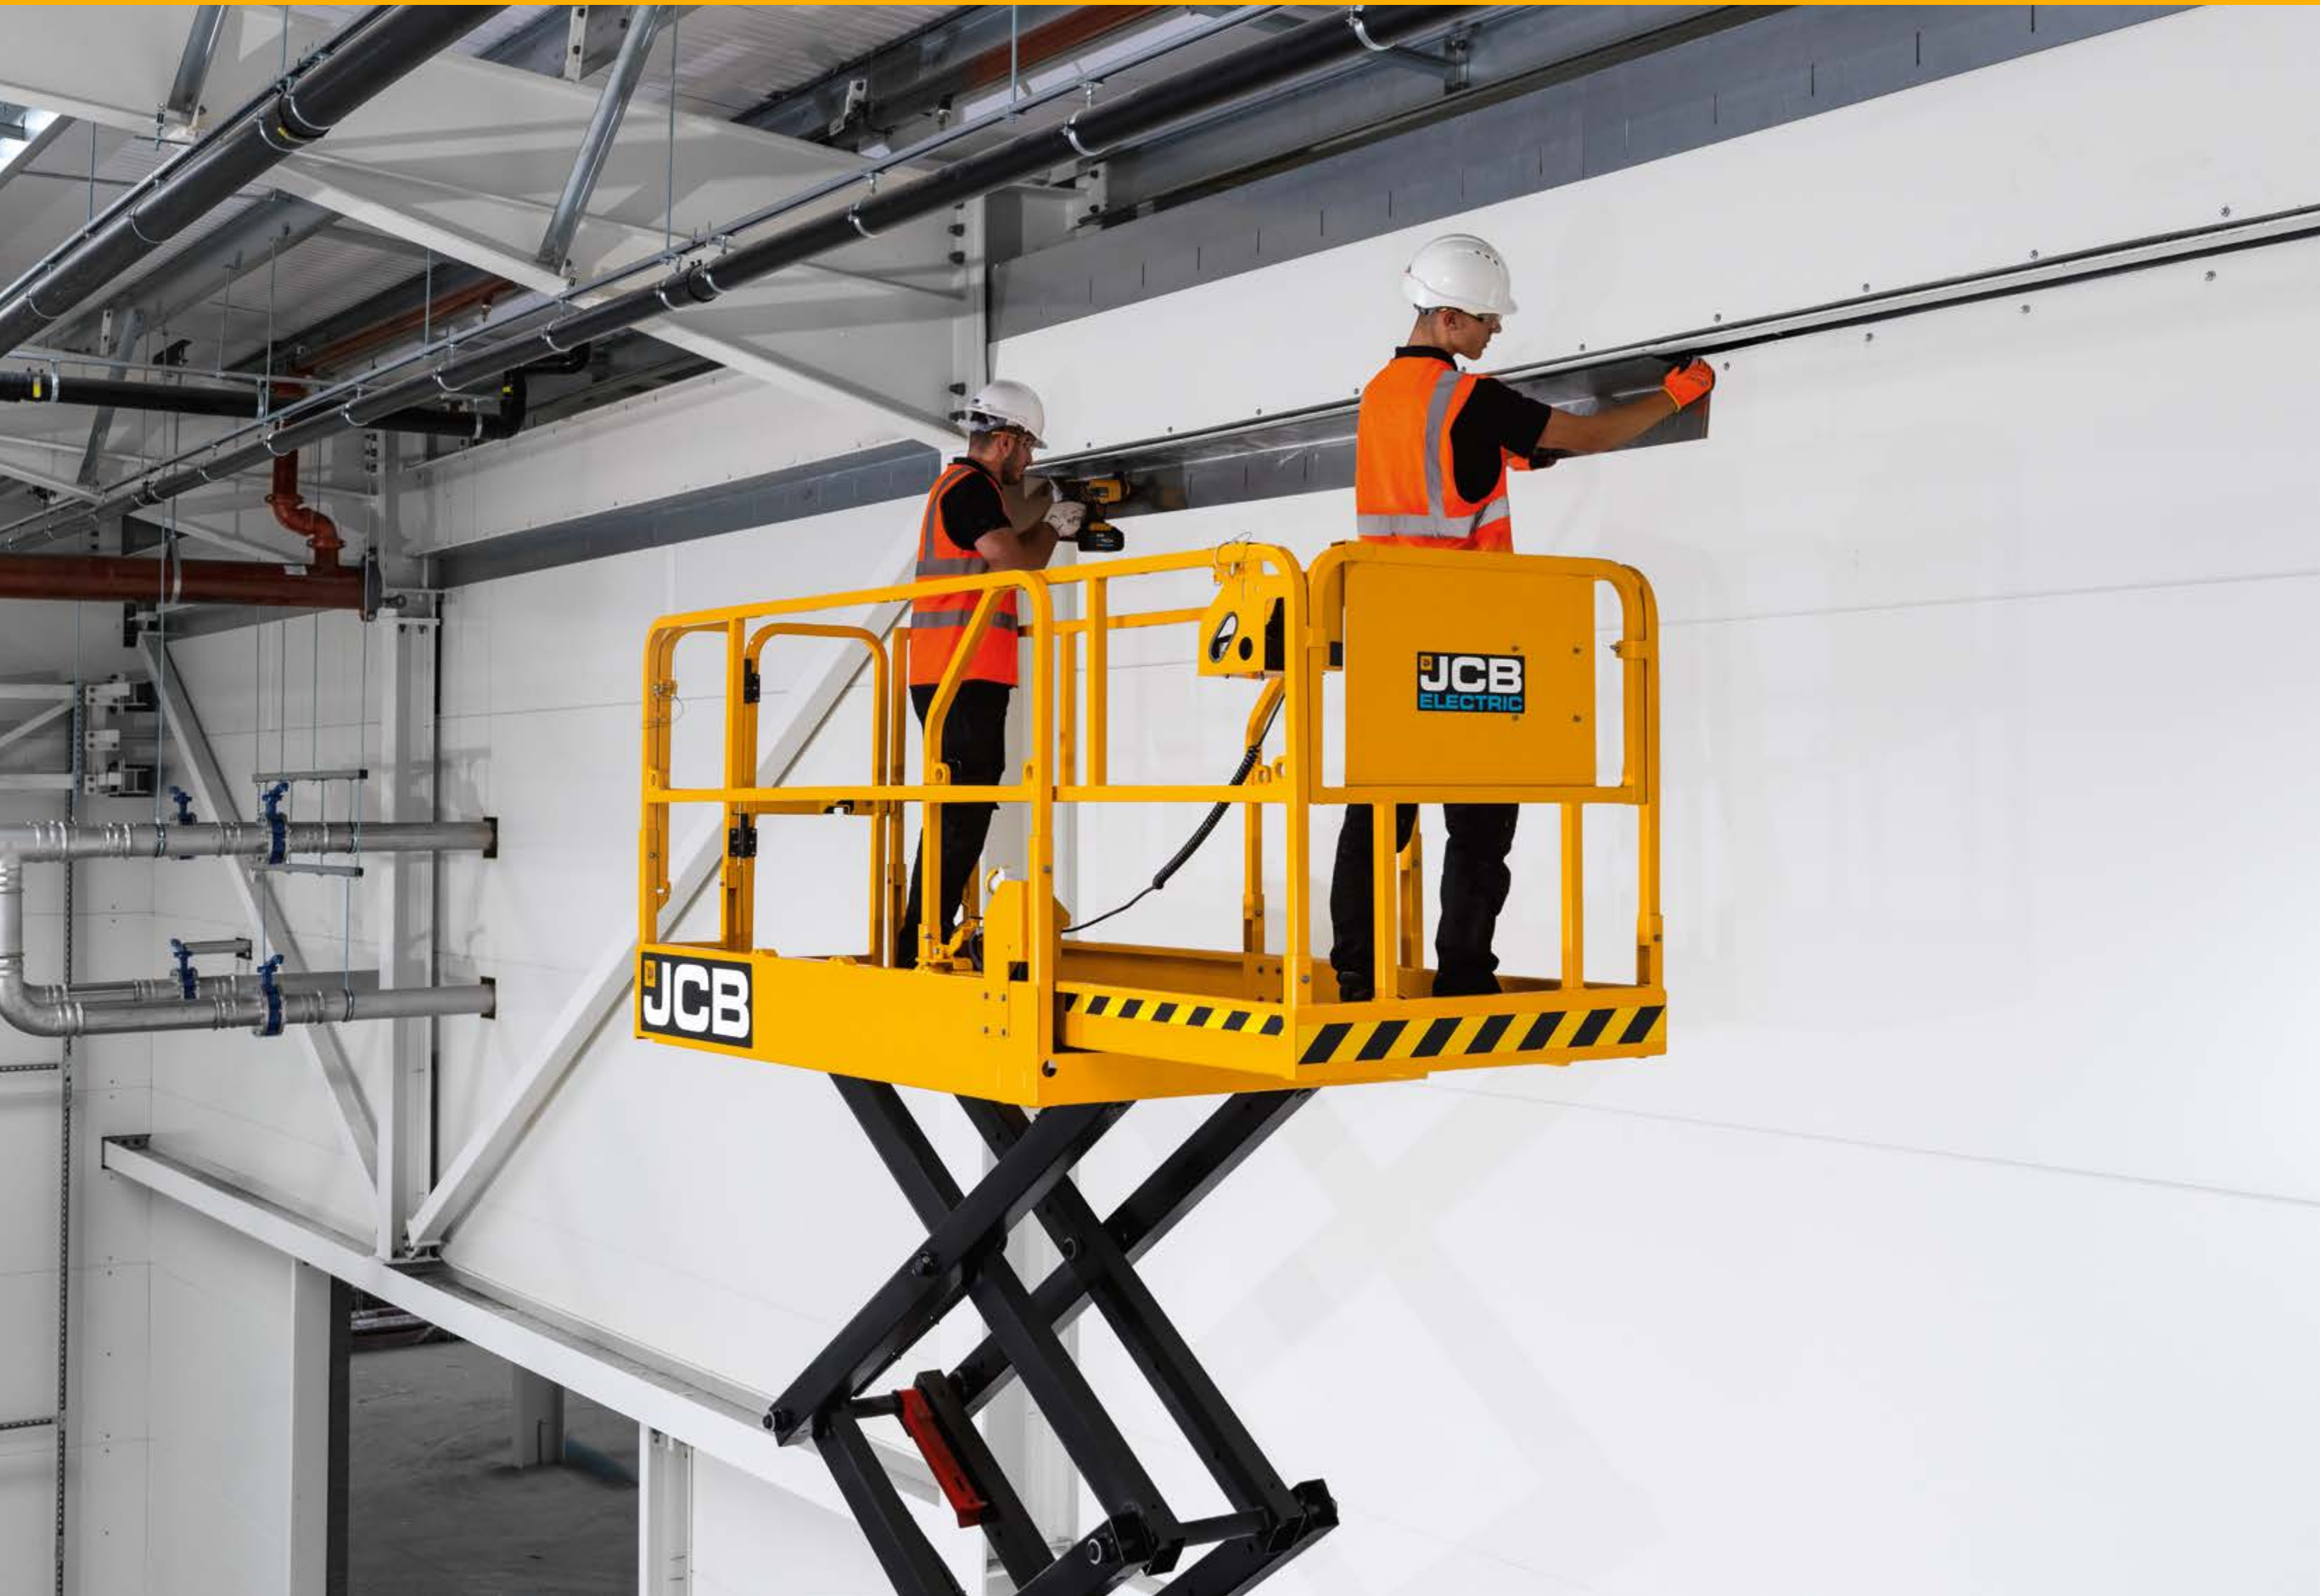

UNIQUE DESIGN

EPD paint protection prevents corrosion. Full-size pivot bosses and our scissor pack design enable market-leading stability at height.


OPERATOR FRIENDLY MACHINES

Roller design and a foot pedal allow easy extension and retraction, even at height. Rapid Field Calibration enables on-site recalibration in under 4 minutes.



EASY TO WORK

A controller cradle and front chassis winch point allow for easy manoeuvring. The SI932E machine provides the option to have folding rails flush with the platform.

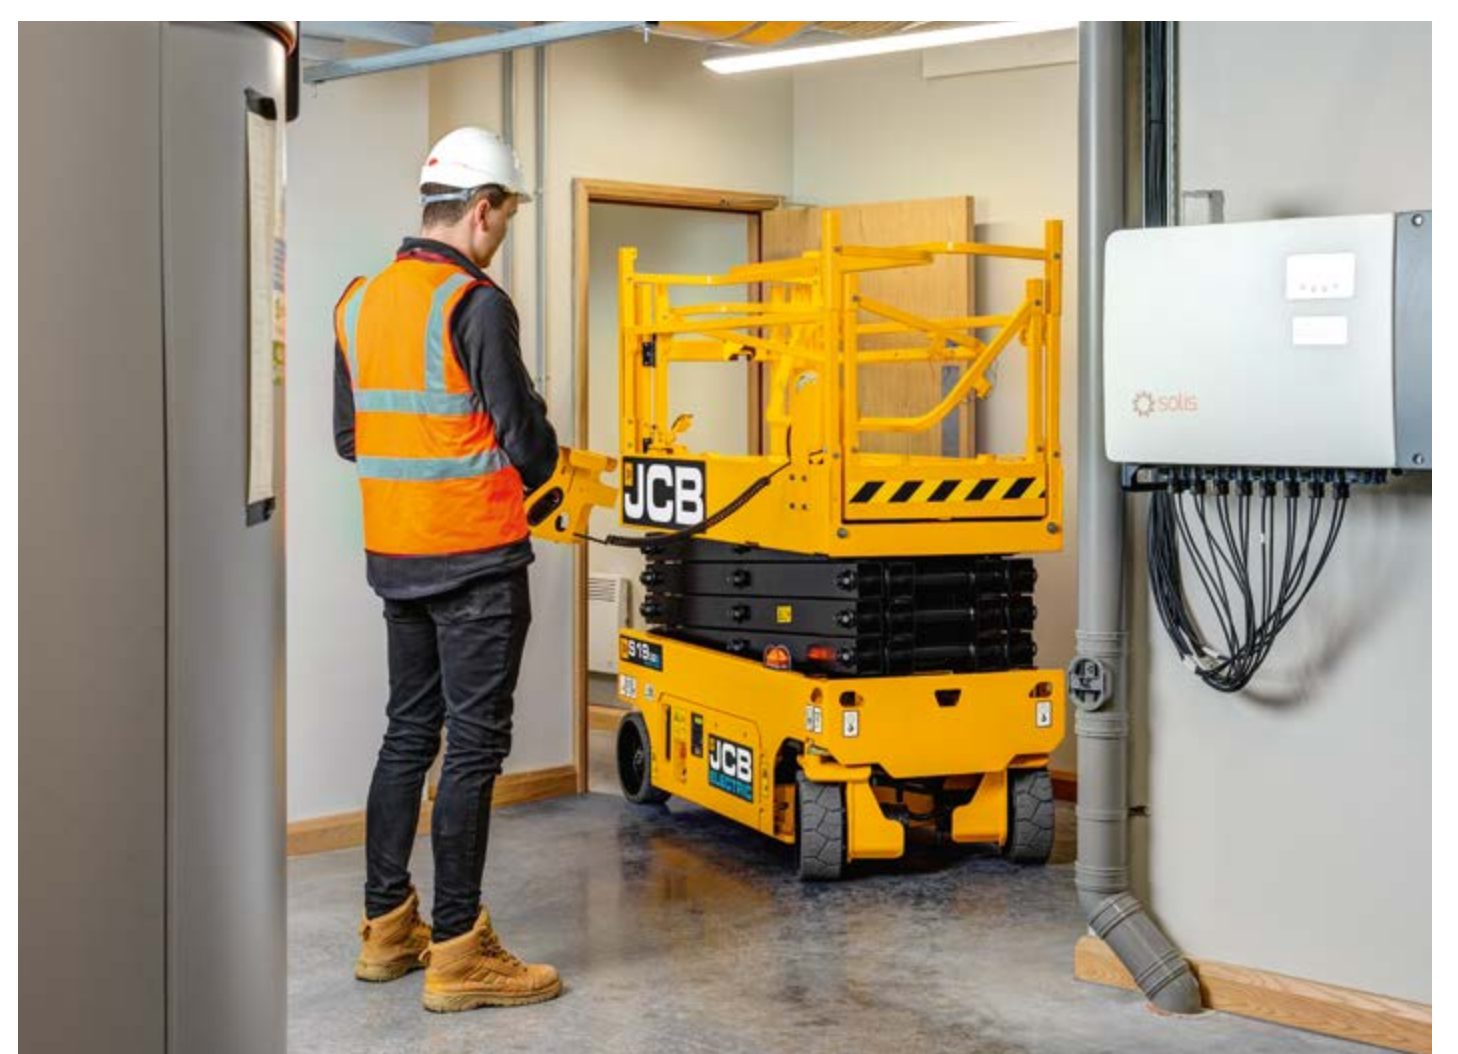

SAFETY FIRST

The pothole protection system is a key feature of the safety system, ensuring the machine only raises when it is fully deployed.



GREATER CONTROL

Fully proportional raise and drive controls with creep speed mode allows for precise machine movement at height.

INDUSTRY-LEADING SUPPORT

The optional JCB LiveLink[®] telematics system provides real-time information, allowing you to manage a single machine or an entire fleet with ease.




SAME DAY SUPPORT

Access same-day genuine JCB parts and fully trained engineers for ultimate peace of mind.



ELECTRIC ACCESS PLATFORMS | S1932E-S4550E

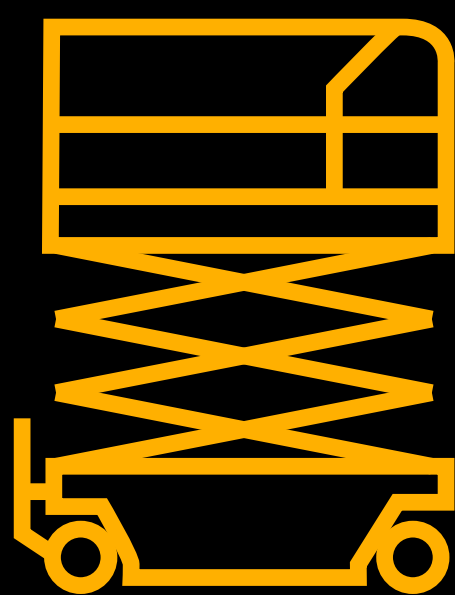

SPECIFICATION

ELECTRIC DRIVE MODELS	S1932E, S2632E, S2646E, S3246E, S4046E, S4550E
Max platform height	5.71m – 13.8m
Extension outreach	0.9m
Overall length (stowed)	1.78m – 2.76m
Overall width (stowed)	0.82m – 1.27m
Overall height (stowed, guardrail folded)	1.85m – 2.20m
Overall weight	1,590kg – 3,538kg
HIRD cycle	30.5m



STANDARD FEATURES

- Ergonomic controller cradle
- Pothole protection struts
- Industry standard componentry
- Power outlet in the basket
- Front winch point
- Non-marking tyres
- 2-wheel drive (front)
- Easy to view charge indicator
- Ergonomic door handle design
- High quality JCB parts



SCISSOR LIFTS
100% ELECTRIC, ZERO EMISSIONS

HIGHER STANDARDS

FIND OUT MORE



www.jcb.com/electric