


MACHINE SPECIFICATIONS

F	Platform length	m (in)	1.64 (65)
	Platform width	m (in)	0.75 (29.5)
G	Platform height	m (in)	1.1 (43)
	Load capacity	kg (lb)	230 (505)
	Max. platform occupants (indoor / outdoor)	person	2 / 1
	Max. allowable slope (front to back / side to side)	degrees	3 / 1.5
H	Ground clearance	m (in)	0.07 (2.75)
	Wheelbase	m (in)	1.33 (52)
	Turning radius (outside)	m (ft-in)	1.49 (4-11)
	Turning radius (inside)	m (in)	0.04 (1.5)
	Gradeability	%	25
	Max driving speed (stowed)	km/h (mph)	4
	Max driving speed (raised)	km/h (mph)	0.8
	Raising speed (loaded)	s	20-25
	Lowering speed (loaded)	s	25-30
	Solid tyre dimensions	mm (ins)	305 x 115 (12 x 4.5)
	Hydraulic tank volume	L	12
	Hydraulic system volume	L	14
	Hydraulic system pressure	MPa	24.8
	Battery	Ah @ 20h	6V x 4 (225)
	Power unit	V	24
	Input voltage of charger	V AC	100-240V
	Tyres		Non-marking

DIMENSIONS - ELECTRIC DRIVE

A	Max. platform height (indoor)	m (ft-in)	5.71 (18-9)
	Max. platform height (outdoor)		5.71 (18-9)
B	Max. working height	m (ft-in)	7.71 (24-9)
	Extension outreach	m (in)	0.9 (35)
C	Overall length (stowed)	m (ft-in)	1.78 (5-10)
D	Overall width (stowed)	m (ft-in)	0.82 (2-8.2)
	Overall height (stowed, guardrail folded)	m (ft-in)	1.85 (6-1)
E	Overall height (stowed, guardrail unfolded)	m (ft-in)	2.12 (6-11)
	Overall weight	kg (lb)	1590 (3505)

WORK ENVELOPE

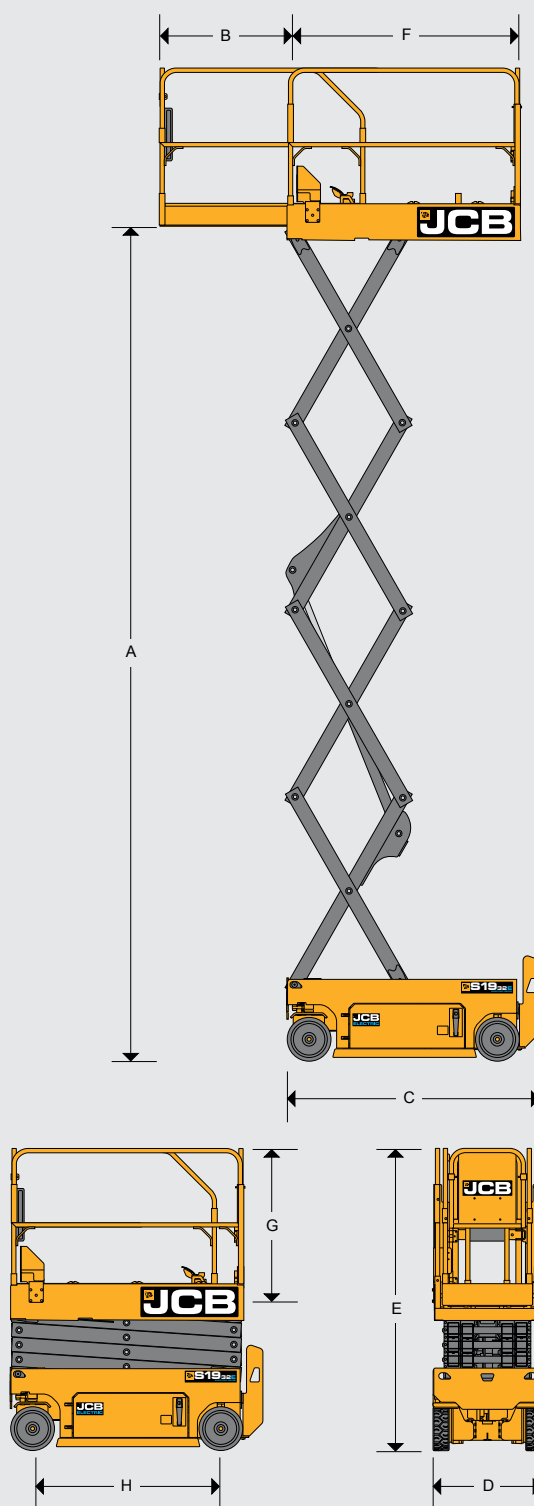

Your nearest JCB dealer

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: salesinfo@jcb.com

Download the very latest information on this product range at: www.jcb.com