#### ELECTRIC TELETRUK 30-19E / 35-22E








# MAX CAPACITY MAX CAPACITY 2M MAX LIFT HEIGHT 3,000 - 3,500kg 1,900 - 2,200kg 4m


# **GREATER PRODUCTIVITY.**

With a choice of two models, the new JCB electric Teletruk range is designed to make the most of your time and space.

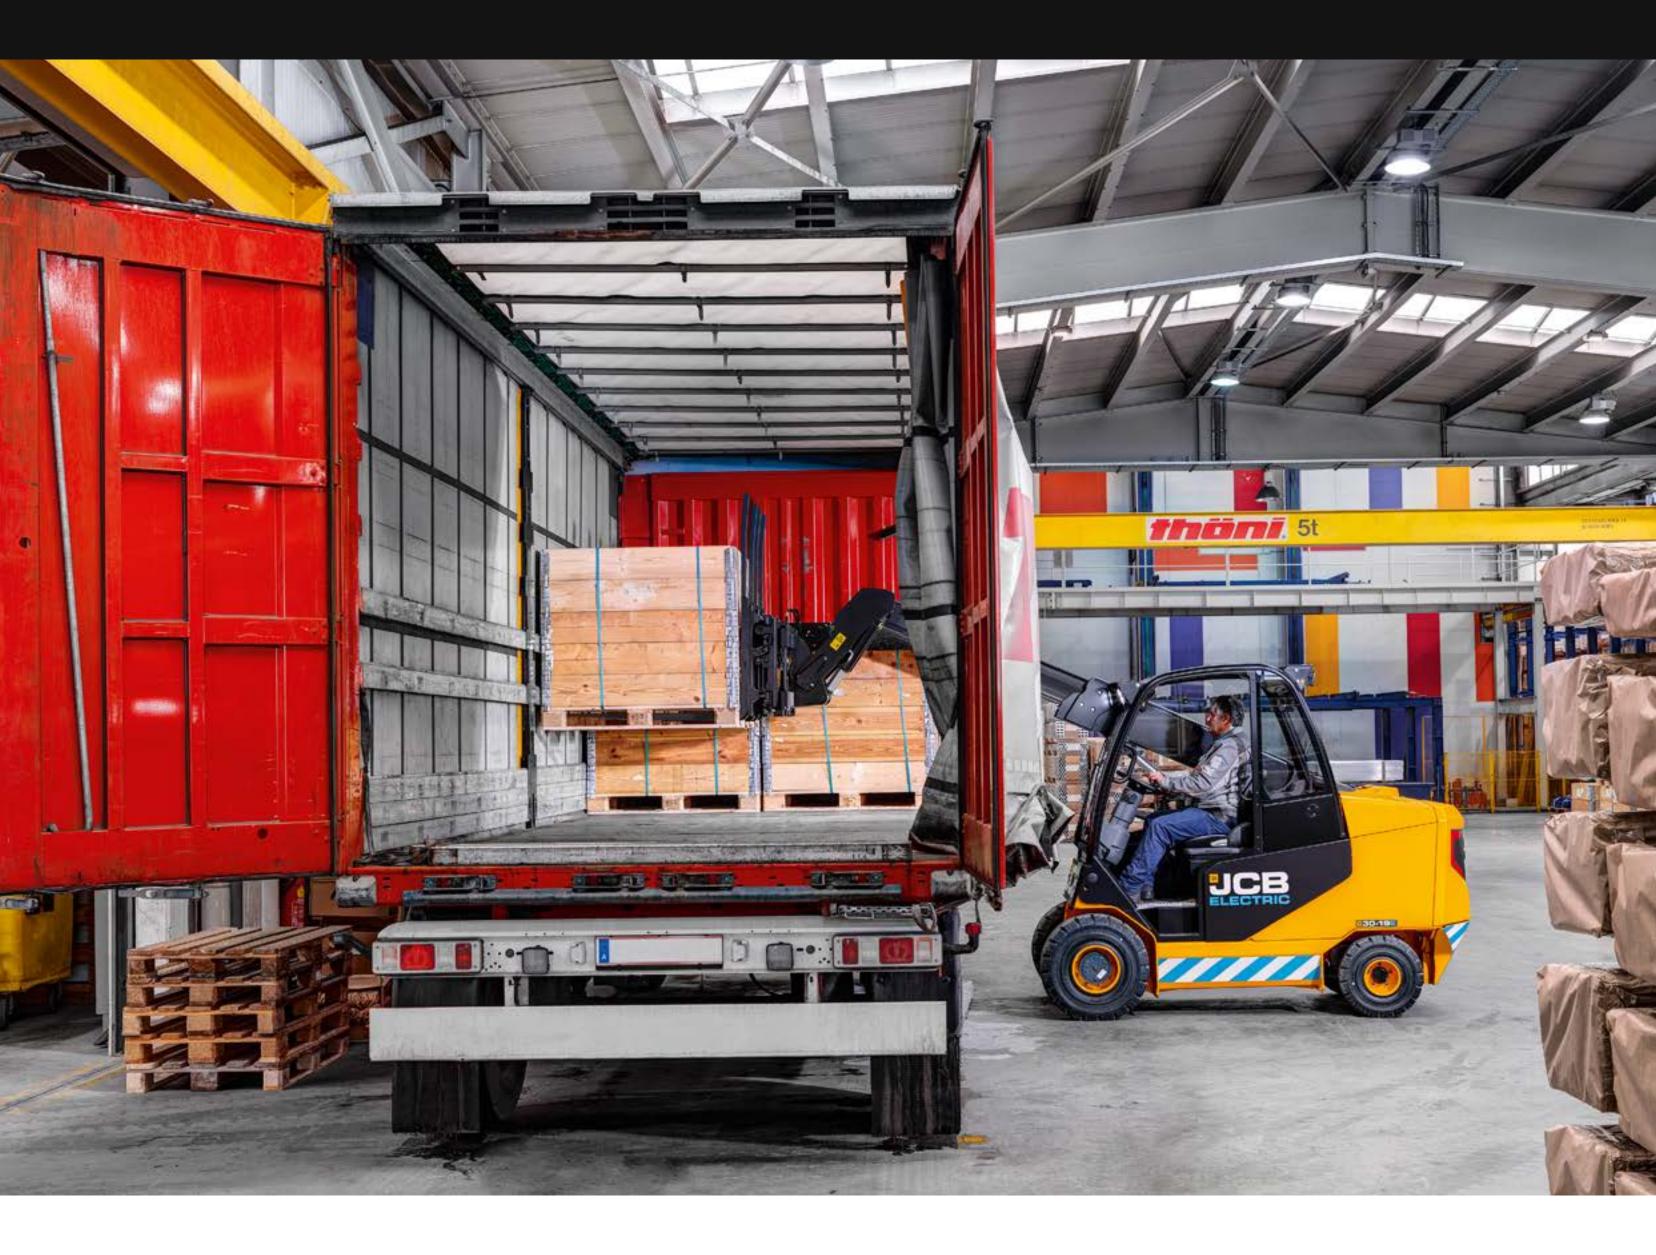



#### LIFT AND LOAD

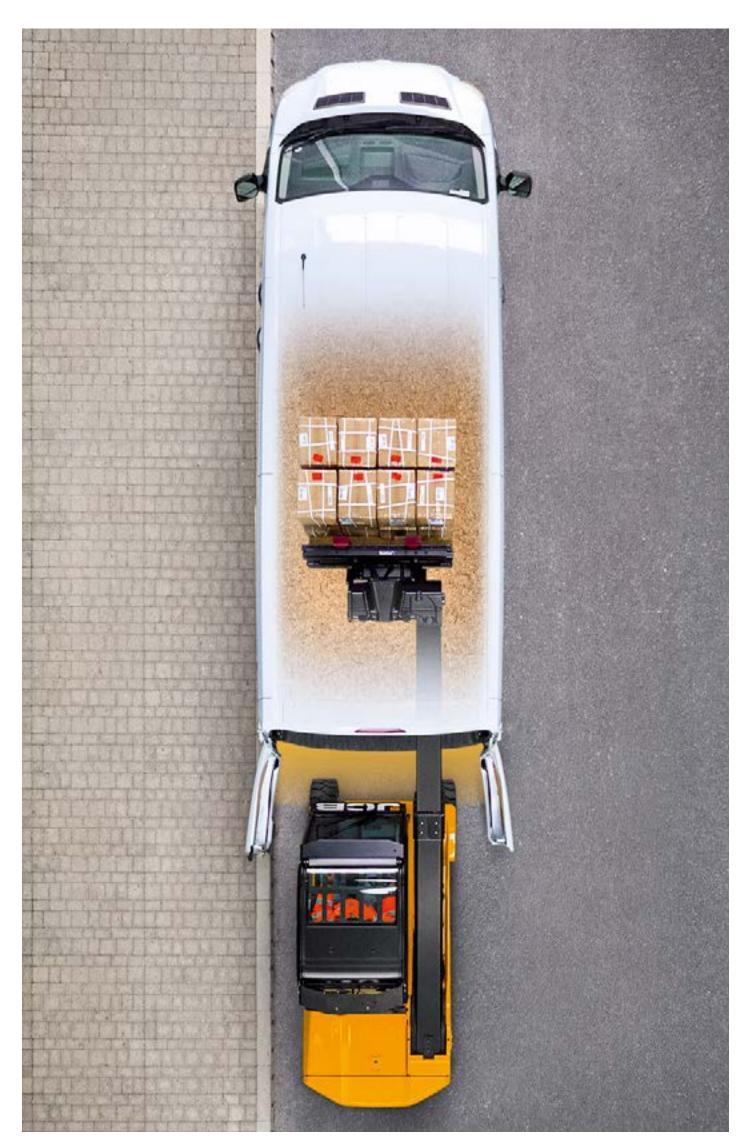

The unique telescopic boom saves 70m<sup>2</sup> of space per truck with single side loading. A low 2.2m cab height allows loading and unloading inside containers and trailers.

#### **GREATER SAFETY.**

With superb visibility and precision control, the Teletruk makes all operators feel in total control within any environment and in any application.






#### **IN COMPLETE CONTROL**

# Unique Load Motion Control feature prevents forward tip, for increased on-site safety.


## **GREATER VERSATILITY.**

With forward reach, low height and small turning circle, the unique JCB electric Teletruk is the world's most versatile counterbalance lift truck.

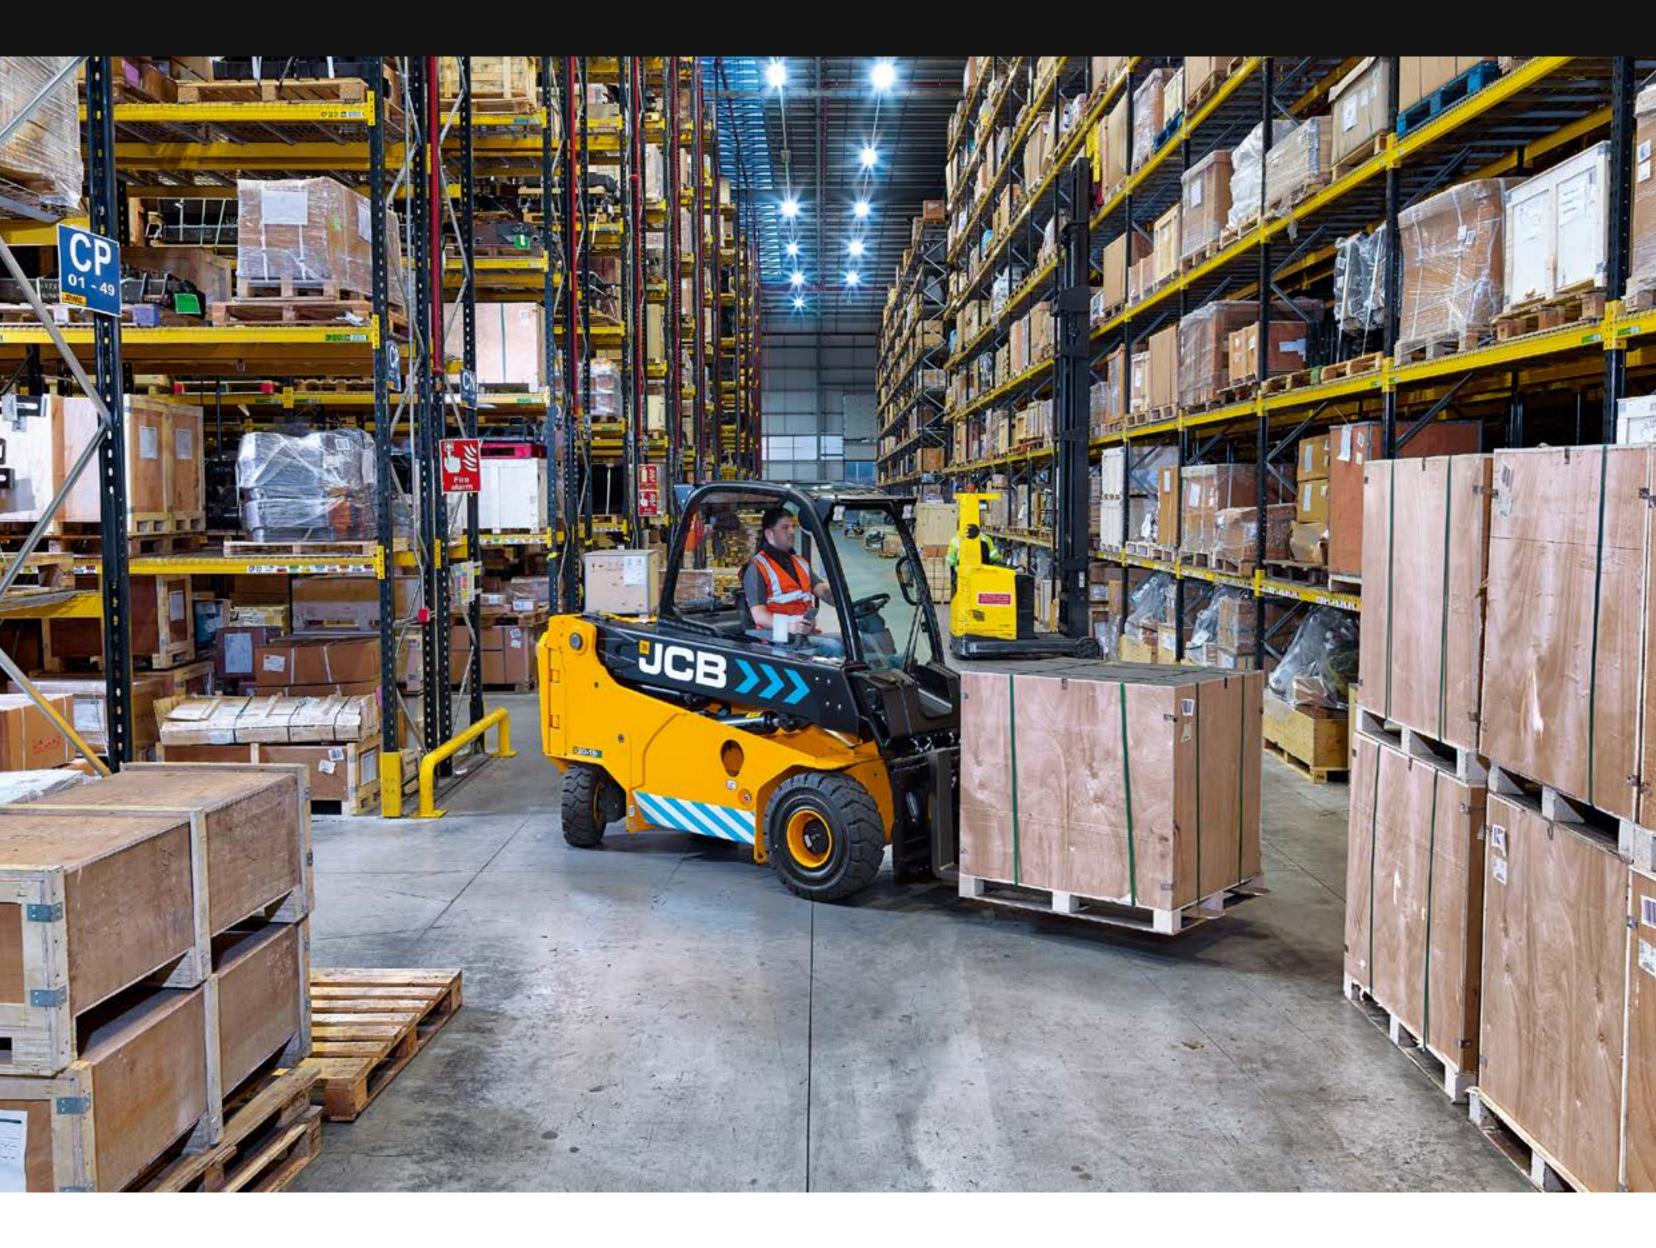





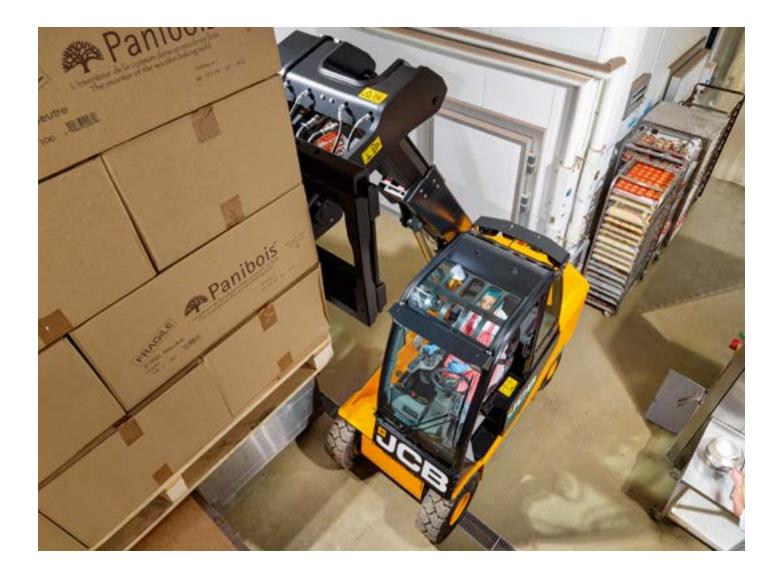

With van, truck, container and rail loading, the Teletruk supports all areas of logistics operations.

#### **GREATER CARE.**

With zero emissions and low noise, both electric Teletruk models are ideal for 24/7 operation in urban environments and noise sensitive areas.







Machine acceleration can be reduced by 10, 20 or 30%, by pressing the eco button.

## **GREATER COMFORT.**

The latest JCB CommandPlus cab ensures superior operator comfort throughout the working day, enabling you to gain maximum productivity.







#### **COMPLETE VISIBILITY**



The Teletruk's unique side-mounted boom design provides unrivalled 360°

visibility for the operator.

#### ELECTRIC TELETRUK30-19E / 35-22E



#### SPECIFICATION.

MODEL	<b>30-19E</b>	<b>35-22E</b>
Lift height	<b>4,000mm</b>	<b>4,000mm</b>
Lift capacities	3,000kg	3,500kg
Capacity at 2m	I,900kg	2,200kg
Aux hydraulics flow	2 x 70l/min	2 x 70l/min
Travel speed	18kph	l8kph
Turning radius	<b>2,550mm</b>	<b>2,590mm</b>



#### **STANDARD FEATURES.**

- Powerful AC drive motors
- Single lever EH joystick
- ROPS/FOPS certified cab
- 90° rear axle spin turn
- III° of full carriage rotation
- 2 x 70 l/min auxiliaries
- Load motion control
- Indoor/outdoor operation ready
- JCB LiveLink telematics
- 2 years warranty

# ELECTRIC TELETRUKS 100% ELECTRIC, ZERO EMISSIONS

# 100% electric. Zero emissions.

JCB

JCB

35-22

#### **FIND OUT MORE**



#### www.jcb.com/electric

28937 / en-GB / Issue I

©2020 J C Bamford Excavators Ltd.