

TANDEM VIBRATORY ROLLERS | CT160-260

JCB

**EASY
— IN A —
HARD WORLD**



OPERATING WEIGHT
1,710 - 2,560kg

ENGINE POWER
14.2 - 18.2kW

DRUM WIDTH
800 - 1,200mm

POWER, PERFORMANCE, PRODUCTIVITY.

Both the CT160 and CT260 feature high centrifugal forces and static linear loads for the best compaction performance – dynamically or statically – on aggregates or asphalt.



PROVEN PERFORMANCE

The simple drum offset increases the efficiency and the chamfered drum edges create a smooth finish. The pressurised water sprinkler with upward facing nozzles ensures sufficient water supply on the drums.

EASY AND EFFICIENT.

The new JCB CT160 and 260 tandem rollers have been designed to be easy to use, easy to be productive, easy to keep safe and secure and easy to service.



BUILT FOR EFFICIENCY

The CT160 & CT260 feature the latest EU Stage V and EPA Tier4f Kubota engines. Both engines have a mechanical fuel injection and come without DPF and Adblue.

VISIBILITY, COMFORT, EASE OF USE.

With a simple, intuitive control layout and superior operator comfort, our new tandem rollers make working not just easy but also a pleasure.



EASY TO CONTROL

A responsive directional drive lever makes for smooth operation, while our CT control panel has easy to understand work modes and easy to use switches.



SERVICEABILITY.

Easy access engine service points, longer service intervals and many zero maintenance parts, our new CT160 and 260 tandem rollers are easy to maintain.



EASY TO ACCESS

The well-protected radiator position at the centre of the machine makes it easy to clean and creates easy access to the battery and service points.

SAFETY AND SECURITY.

With JCB's LiveLink telematics system as standard, plus many built-in safety features, the new CT160 and 260 tandem rollers give you complete peace of mind.



SAFE TO USE

The operator-present seat switch provides safety when mobile but has a timed cut-out delay, which still allows free movement on the seat.



TANDEM VIBRATORY ROLLERS | CT160-260



SPECIFICATION.

MODEL	CT160	CT260
Operating weight	1,710 - 1,790kg	2,420 - 2,560kg
Drum width	80 - 100cm	100 - 120cm
Static linear load (front/rear)	8.4 - 11.4kg / cm	10.5 - 12.3kg / cm
Engine power	14.2kW	18.2kW
Frequency	50 - 66Hz	50 - 66Hz
Centrifugal force	10.0 - 19.1kN	23.6 - 41.1kN


LIVE JCB LINK
FITTED AS STANDARD

COOLANT LEVEL	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
WASHER BOTTLE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BRAKE RESERVOIR	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
FUEL	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
DEF	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BODYWORK & GLAZING	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
TYRE/TREAD COND.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>



LWE-1209-2108
001238763

2 Health 1 Failed check

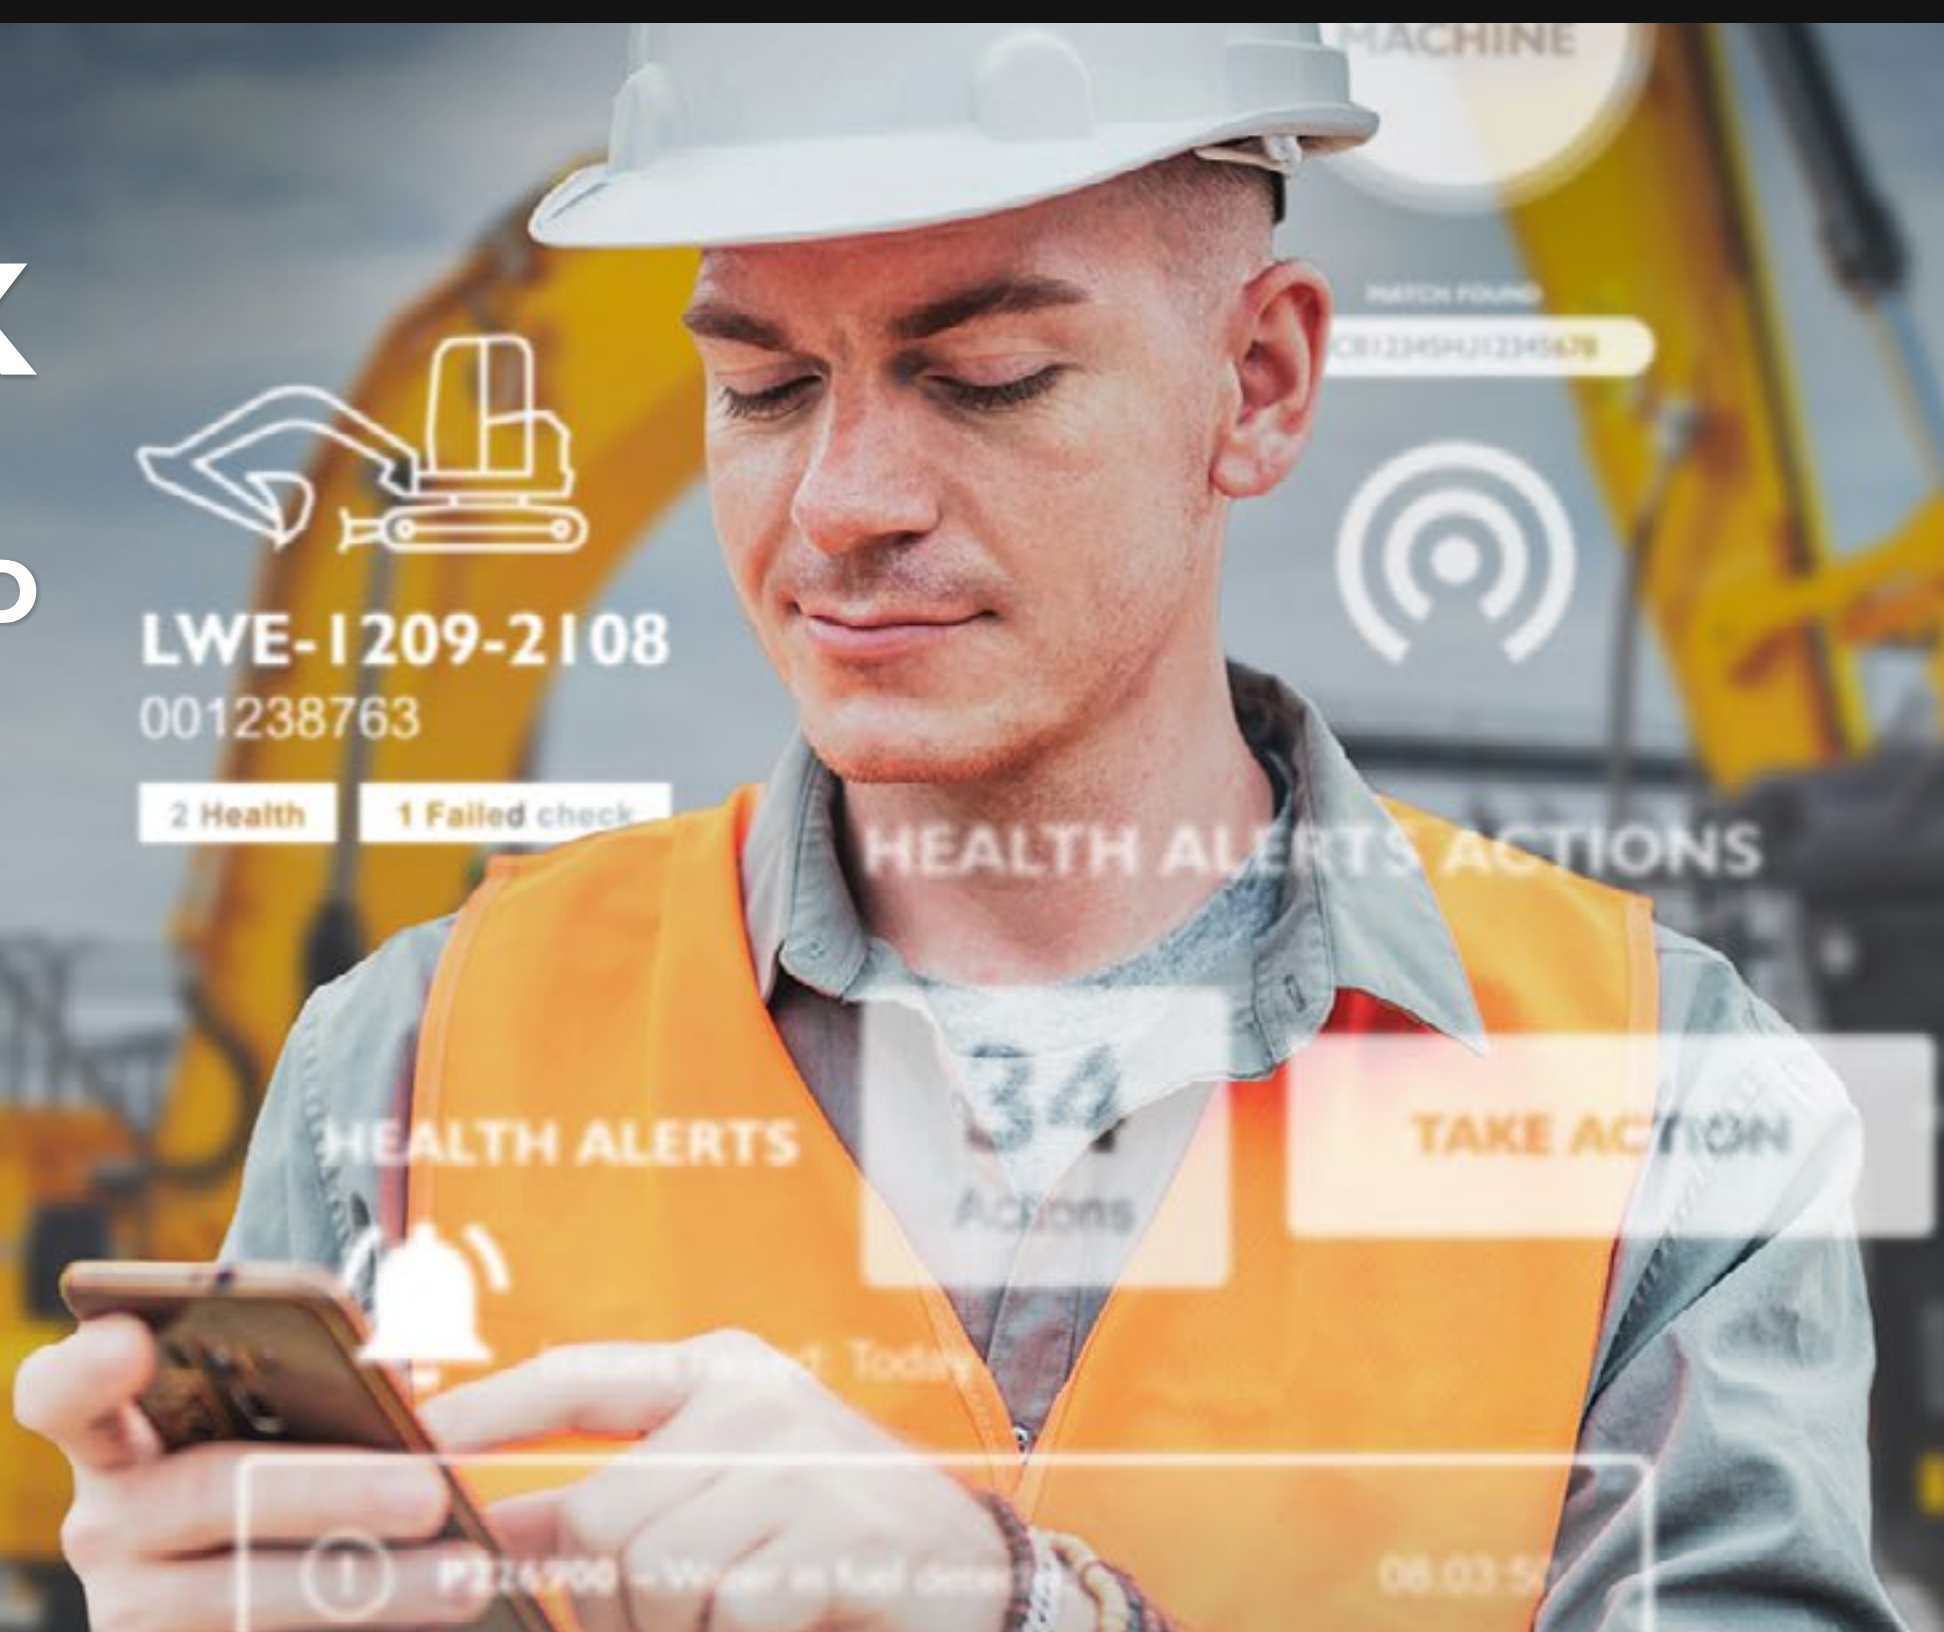

STANDARD FEATURES.

- 2 Year LiveLink telematic contract
- Mechanical injection Kubota engine
- Maintenance free centre joint
- High visibility tapered front frame
- EU Stage V & EPA T4f compliant engine
- Upward facing spray nozzles
- Central lifting eye
- Integrated vandal cover
- Automatic vibration control
- 56 / 60mm drum offset



EASY IN A HARD WORLD.

FIND OUT MORE

REQUEST A QUOTE

JCB

www.jcb.com

