

## SPECIFICATION

JCB E-TECH



### ELECTRIC DUMPER | ITE

Payload: 1Ton Operating weight: 3,583lbs Battery capacity: 10kWh

JCB



# 100% electric. Zero emissions.

JCB is leading the way in clean technology and reducing harmful emissions. That's why we are introducing JCB E-TECH, a new generation of electric products with zero emissions at point of use that don't compromise on performance. The new ITE, 1 ton fully electric machine challenges perceptions of where site dumpers can operate. With zero emissions during use, the machine can operate indoors and in noise sensitive environments.

## ZERO EMISSIONS.

The ITE is a new 1 ton, fully-electric dumper designed to work in urban, air quality sensitive environments and enclosed spaces.




## INDUSTRY'S SAFEST.

The ROPS frame ensures operator safety, while the LED beacons and reverse alarm alert pedestrians of the machine's presence.

## SILENT NIGHT.

The ITE electric dumper can carry on working through the night in any conditions, with near-silent operation and powerful LED work lights.

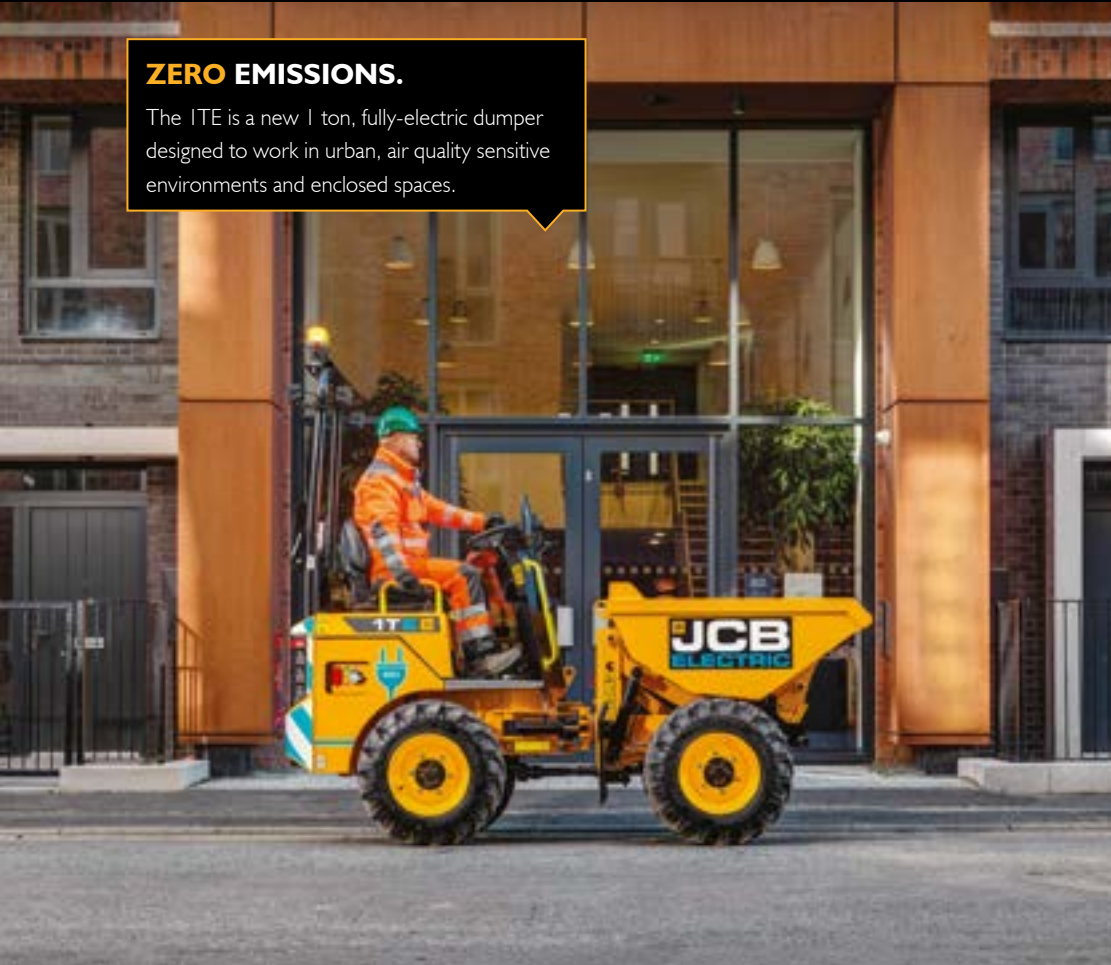


## KEEP MOVING.

Powered by robust lithium-ion batteries, charged using the rapid charger, the ITE will work a full day's shift.

## ULTIMATE VERSATILITY.

The High-tip skip allows the dumper to unload material into dumpsters or large containers, and the compact design enables the machine to work in confined areas.

**STATIC DIMENSIONS**

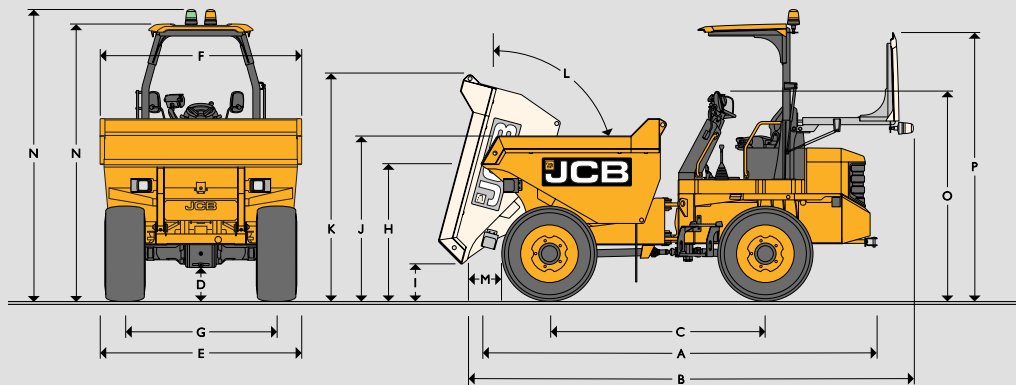

**STATIC DIMENSIONS AND CAPACITIES**

A	Overall length	ft-in (mm)	10-2 (3095)
B	Overall length (ROPS or FOPS folded)	ft-in (mm)	11-2 (3403)
C	Wheelbase	ft-in (mm)	4-11 (1500)
D	Minimum ground clearance	ft-in (mm)	0-10 (263)
E	Total width (Standard/Narrow tyres)	ft-in (mm)	3-8 (1106)
F	Skip width	ft-in (mm)	3-3
G	Track width (Standard/Narrow tyres)	ft-in (mm)	2-10 (850)
I	Height to front lip of skip (untipped)	ft-in (mm)	3-9 / 7-5 (1134/2259)
H	Height to front lip of skip (tipped)	ft-in (mm)	1-6 / 5-2 (452/1573)
J	Load over height	ft-in (mm)	4-2 / 7-10 (1268/2392)
K	Height over skip (tipped)	ft-in (mm)	6-1 / 10-0 (1865/3037)
L	Skip tip angle	Degrees	90
M	Discharge distance front	ft-in (mm)	1-3 (391)
	Discharge distance side	ft-in (mm)	-
	Turning radius to outside of skip	ft-in (mm)	8-11 (2712)
	Turning radius to outside of tyres	ft-in (mm)	8-5 (2559)
	Steering angle (+/-)	Degrees	39
	Oscillation	Degrees	15
N	Height to top of ROPS (with/without beacon)	ft-in (mm)	9-2 / 8-6 (2792/2602)
O	Height with folded ROPS	ft-in (mm)	5-4 (1624)
P	Height with folded ROPS/FOPS	ft-in (mm)	-

**CAPACITIES**

Payload	lbs (kg)	2205 (1000)
Operating Weight	lbs (kg)	3583 (1625)
Tipping type		Front tip – High tip
Skip Capacity (fluid)	cu yds (L)	0.40 (307)
Skip Capacity (struck)	cu yds (L)	0.59 (454)
Skip Capacity (heaped)	cu yds (L)	0.72 (554)

**TRANSMISSION**

Type	Hydrostatic motor via transfer box to front and rear axles	
Tire Size	255 / 75 x 15.3 x 8 ply	
Drive	Hydrostatic 1/1	
Max. travel speed (unladen) 1st gear	mph (kph)	7.4 (11.9)

**ELECTRICAL SYSTEM**

System voltage	V	12
Alternator output	A	40
Battery capacity	Ah	80

**SERVICE FILL CAPACITIES**

Hydraulic tank	gal (L)	7.40 (28)
----------------	---------	-----------

**BRAKING**

Working brake	Hydrostatic dynamic braking on rear wheel motors
Parking brake	Hydrostatic dynamic braking on rear wheel motors

**CHARGING**

On-board charger allowing direct connection to AC mains power supply	
Indicative Charge Time - 20-80%, subject to environmental conditions.	2hr 35min (@230V)
Off-board fast charge - 0-100% @ 415V	1hr 40min
Charging cable plug type	16A 110V (yellow)
	16A 230V (blue)
	16A 415V (red)

**MOTOR**

Motor Type	3 Phase AC Permanent Magnet
Motor Power	7kW continuous, 20kW peak

**POWER SOURCE**

Battery Type	Manganese laminated Lithium-ion
Gross Capacity	10 kWh
System Voltage	48V
Zero Emissions at point of use	





**100% electric. Zero emissions.**

Your nearest JCB dealer

### **Electric Dumper ITE**

Payload: 1 Ton Operating weight: 3,583lbs Battery capacity: 10kWh

### **JCB North America**

2000 Bamford Blvd., Pooler, Georgia, 31322 Tel: (912) 447-2000

Download the very latest information on this product range at [www.jcb.com](http://www.jcb.com)

JCB inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB inc. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

DWUSA 5729 01/2022

 JCBNA  @JCBNA  JCBNORTHAMERICA  JCBNA

